




# VScom 200/55 Turbo

2 RS232 ports Turbo ISA Card



## KEY FEATURES

- 2 x RS232 Ports
- 2 x 16550 UARTs (16 Byte FIFO)
- Possible I/O-addresses COM1 - COM7
- Configured by Jumper
- Software compatible with DOS, Win3.x/95/98/ME/NT/2000, Linux, OS/2

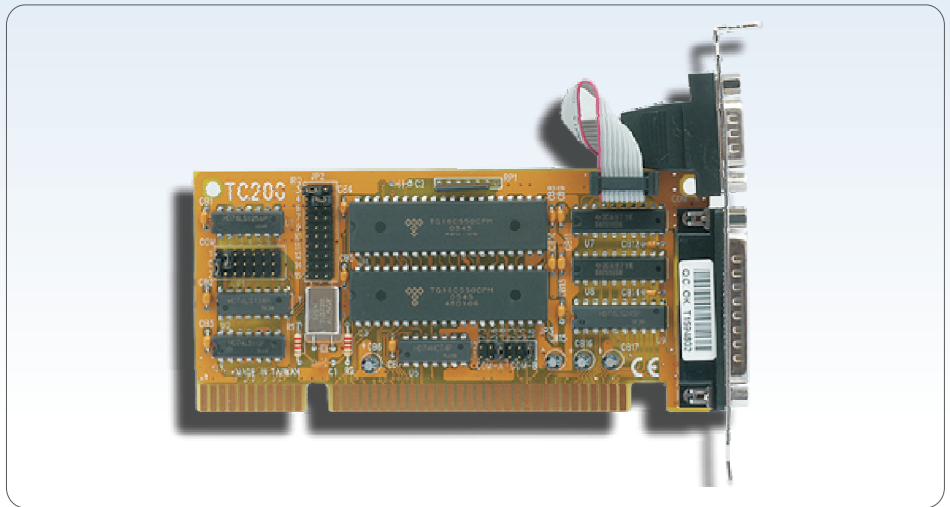

## Specifications

Hardware	
Ports	2 x RS232
UART	2 x 16550 (16 Byte FIFO)
Address	COM1 .. COM7
Interrupts	IRQ2 .. IRQ15
Speed	Max. 460 kbps
Bus interface	ISA
Connectors	1 x DB9 male, 1 x DB25 male
Size	13.7cm x 6.5cm (L x H)
Temperature	0°C - 55°C
Operating Systems	Compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware
Driver	No special Drivers

## Ordering Information

Art. No	449
Product Name	VScom 200/55 Turbo
Packing List	VScom 200/55 Turbo, German documentation