




VScom 400 Turbo

4 RS232 ports Turbo ISA Card



KEY FEATURES

- 4 x Rs232
- 4 x 16550 UARTs (16 Byte FIFO)
- I/O-Addresses Configuration 7 for DOS, 7 for UNIX
- Configured by Jumper
- Software compatibel with DOS, Win3.x/95/98/ME/NT/2000, Unix, Linux, OS/2, Netware

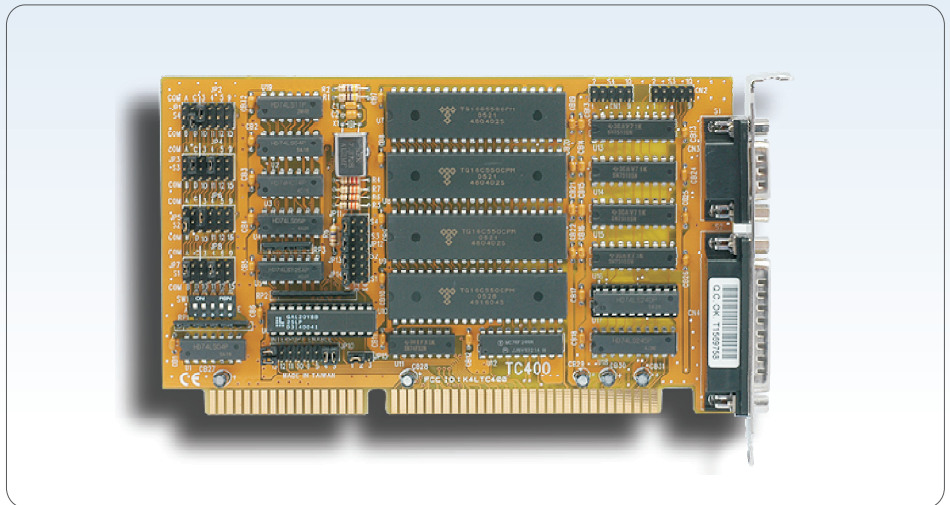

Specifications

Hardware	
Ports	4 x RS232
UART	4 x 16550 (16 Byte FIFO)
Address	7 for DOS (from COM1 .. 8), 7 for UNIX (blockaddress with Int.-Vector-Register)
Interrupts	IRQ 3,4,5,9,10,11,12,15 supports Interruptsharing
Speed	Max. 460 kbps
Bus interface	ISA
Connectors	1 x DB9 male, 1 x DB25 male; 1 x DB9 male, 1 x DB25 male (2. Slot)
Size	16.7cm x 10.0cm (L x H)
Temperature	0°C - 55°C
Operating Systems	Compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware
Driver	No special Drivers

Ordering Information

Art. No	460
Product Name	VScom 400 Turbo
Packing List	VScom 400 Turbo, cable, German documentation