




# VScom 800 Turbo

8 RS232/422 ports Turbo ISA Card



## KEY FEATURES

- 8 x Rs232
- 8 x 16550 (16 Byte FIFO)
- I/O-Addresses Configuration 7 for DOS, 7 for UNIX
- Configured by Jumper
- Software compatibel with DOS, Win3.x/95/98/ME/NT/2000, Linux, OS/2, Netware

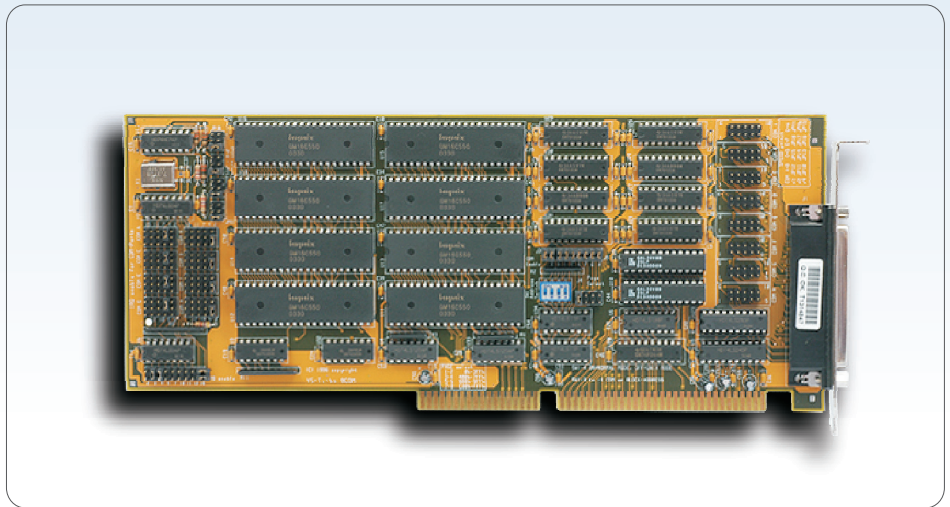

## Specifications

|                   |   |
|-------------------|---|
| Hardware          |   |
| Ports             | 8 x RS232 or RS422 (depending on connection-option)                                 |
| UART              | 8 x 16550 (16 Byte FIFO)  |
| Address           | 7 for DOS (from COM1 .. 12),<br>7 for UNIX (blockaddress with Int.-Vector-Register) |
| Interrupts        | IRQ2 .. IRQ15, supports Interruptsharing  |
| Speed             | Max. 460 kbps   |
| Bus interface     | ISA   |
| Connectors        | 1 x DB62 female   |
| Size              | 26.6cm x 11.3cm (L x H)   |
| Temperature       | 0°C - 55°C  |
| Operating Systems | Compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware           |
| Driver            | No special Drivers  |

## Ordering Information

|              |                                       |
|--------------|---------------------------------------|
| Art. No      | 461                                   |
| Product Name | VScom 800 Turbo                       |
| Packing List | VScom 800 Turbo, German documentation |