




VScom 400 Pro

4 RS232 ports ISA Card



KEY FEATURES

- 4 x Rs232
- 4 x 16C550 UARTs (16 Byte FIFO)
- Possible I/O-addresses 100h..7F8h
- No jumper, configured by software
- Software compatibel with DOS, Win3.x/95/98/ME/NT/2000, Linux, OS/2, Netware

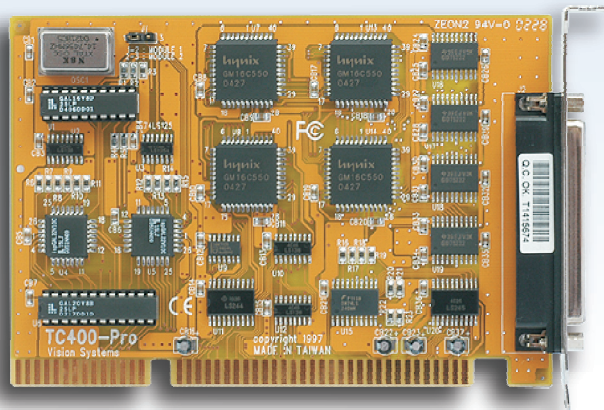

Specifications

Hardware	
Ports	4 x RS232
UART	4 x 16C550 (16 Byte FIFO)
Address	100h .. 7F8h
Interrupts	IRQ2 .. IRQ15, supports Interruptsharing
Speed	Max. 921 kbps
Bus interface	ISA
Connectors	1 x DB37 female
Size	13.7cm x 10.0cm (L x H)
Temperature	0°C - 55°C
Operating Systems	Compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware
Driver	High-Speed Mode driver for Win95/NT; DOS-configuration-utility

Ordering Information

Art. No	477
Product Name	VScom 400 Pro
Packing List	VScom 400 Pro, Cable (DB37 to 4 x DB25 male, cable length 30 cm), Disk German documentation