




# VScom 420 Turbo

4 RS232, 2 LTP ports Turbo ISA Card



## KEY FEATURES

- 4 x RS232, 2x LPT
- 2 x 16552 UARTs (2x 16 Byte FIFO, 1x LPT )
- Possible I/O-addresses COM1 - COM8, LPT1 - LPT8
- Configured by Jumper
- Software compatible with DOS, Win3.x/95/98/ME/NT/2000, Linux, OS/2, Netware

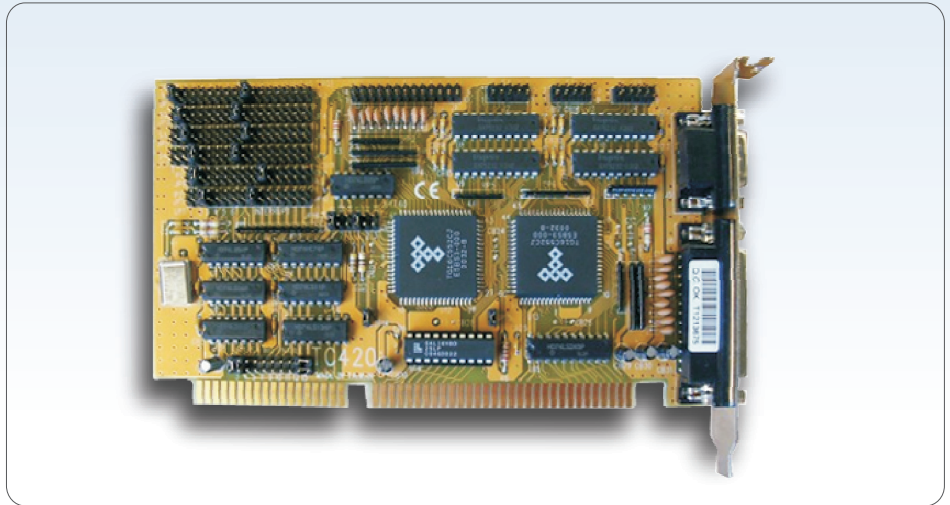

## Specifications

Hardware	
Ports	4 x RS232, 2 x LPT
UART	2 x 16552 (2 x 16 Byte FIFO, 1 x LPT bidirectional); 1 x 451 (3. LPT unidirectional)
Address	COM1 .. COM8, LPT1 .. LPT8
Interrupts	IRQ2 .. IRQ15, supports Interruptsharing
Speed	Max. 460 kbps
Bus interface	ISA
Connectors	1 x DB9 male, 1 x DB25 female (LPT); 1 x DB9 male, 1 x DB25 female (LPT) (2. Slot); 1 x DB9 male, 1 x DB25 male (3. Slot)
Size	19.4cm x 10.7cm (L x H)
Temperature	0°C - 55°C
Operating Systems	Compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware
Driver	No special Drivers

## Ordering Information

Art. No	494
Product Name	VScom 420 Turbo
Packing List	VScom 420 Turbo, Complete, Cableset German documentation