

Serial to RS422/485 Converter SER-485 Lite User Manual

Edition: April 2008



Tel: +49 40 528 401 0
Fax: +49 40 528 401 99
Web: www.visionsystems.de
Support: service@visionsystems.de

The software described in this manual is furnished under a license agreement and may be used only in accordance with the terms of that agreement.

Copyright Notice

Copyright © 2007 Vision Systems. All rights reserved. Reproduction without permission is prohibited.

Trademarks

VScom is a trademark of Vision Systems GmbH. All other trademarks and brands are property of their rightful owners.

Disclaimer

Vision Systems reserves the right to make changes and improvements to its product without providing notice.

Vision Systems provides this document “as is,” without warranty of any kind, either expressed or implied, including, but not limited to, its particular purpose. Vision Systems reserves the right to make improvements and/or changes to this manual, or to the products and/or the programs described in this manual, at any time.

Information provided in this manual is intended to be accurate and reliable. However, Vision Systems assumes no responsibility for its use, or for any infringements on the rights of third parties that may result from its use.

This product might include unintentional technical or typographical errors. Changes are periodically made to the information herein to correct such errors, and these changes are incorporated into new editions of the publication.

Contents

1	Overview	5
2	Introduction	5
3	Operation Modes	6
4	Technical Data	7
5	Configuration of Hardware	7
5.1	Connectors	8
5.2	Signal Assignments RS232	8
5.2.1	CN1 (DB9 RS232)	9
5.2.2	JH1 (DCE or DTE)	9
5.2.3	JP3 (Power over Serial)	9
5.3	Signal Assignment RS422 / RS485	10
5.3.1	CN2 (DB9 RS422 / RS485)	10
5.3.2	TB1 (Terminal Block RS422 / RS485)	10
5.4	LED	11
6	Termination and Polarization (BIAS)	11
6.1	JP2 (Termination / Polarization)	11
6.2	Power supply	12
7	Configuration by Software	12
7.1	1 – RS-422	14
7.2	2 – RS-485 controlled by RTS	15
7.3	3 – RS-485 controlled by DTR	15
7.4	4 – RS-485 controlled by ART	15
7.4.1	a – Tx switch off Delay (long, 11 bit)	16
7.4.2	b – Tx switch off Delay (medium, 6 bit)	16
7.4.3	c – Tx switch off Delay (short, 2 bit)	16
7.5	Cabling Schemes	16
7.5.1	d – Full Duplex (4-wire)	17
7.5.2	e – Half Duplex (2-wire) with Echo	17
7.5.3	f – Half Duplex (2-wire) no Echo	17
7.6	P – Programming Interface	17
7.7	U – Firmware Update	18
8	Proper Cabling	18
8.1	Transmission Technique	19
8.2	Termination	19
8.3	Polarization	19
8.4	2-Wire Scheme	20
8.5	4-Wire Scheme	20
9	ART and Polarization	21
9.1	ART 11 bit delay	22
9.2	ART 6 bit delay	22

9.3	ART 2 bit delay	22
10	Firmware Update	23

List of Figures

1	Internal view of SER-485 Lite	8
2	Menu Factory Settings	13
3	Menu Configuration as RS422	14
4	Menu Configuration closed	14
5	Menu Programming Interface	18
6	2-wire cabling scheme	20
7	4-wire cabling scheme	21

List of Tables

1	Operation configured by DIP Switches	6
2	RS232 DB9 female	9
3	JH1 (DCE / DTE)	9
4	RS422 / RS485 DB9 male	10
5	Terminal Block	10
6	Polarization and Termination	11

1 Overview

The SER-485 Lite converts signals between RS232 and RS422 or RS485.

It is used to convert RS232 signals to RS422/485 networks based on differential balanced electrical signals to allow reliable and long distance (up to 1,3 km) connections. In RS485 halfduplex Mode the switching on and off for Transmit and Receive lines is necessary, which is usually done via software. SER-485 Lite provides a unique hardware based **A**utomatic **R**eceive **T**ransmit control (ART) mode, which allows the shortest switch off time delay over the full range of the bitrate speeds. ART allows the use of software applications written for standard RS232 communication to be unchanged used with SER-485 Lite converter. SER-485 Lite supports all possible operation modes, which can be configured in detail via terminal software. For reliable RS422/485 networks the termination and biasing of the lines are very important. SER-485 Lite enables user to configure the lines in the optimal way. SER-485 Lite comes in a IP30 metal case with wall and DIN Rail mounting capabilities.

- Operation Modes
 - RS422
 - RS485 2-wire
 - RS485 4-wire
- RS485 controlled by RTS or DTR
- RS485 adaptive control by ART
- Easy Software Configuration
- Internal Termination and Polarization
- Metal Case IP 30

2 Introduction

Many devices like machines, printers, sensors etc. provide a serial interface to exchange data with them. Usually this interface follows RS232 specification, because of the simple technology and cable requirements.

There are three limitations in using RS232 connections: limited length of cable at ca. 13 m (40 ft), maximum transmission speed (e.g.. 115 kbit/s on 13 m cable) and PointtoPoint connection only.

Using dual differential signals for both data transmission and receiving, RS422/485 electrical standard allows cable lengths up to 1,2 km and bitrate speeds up to 1 Mbit/s. The used cables are still simple twisted pair wires, but the connection lines becomes "long transmission lines" and request therefore termination and biasing resistors. RS485 mode allows multipoint connections, such as Master to N-Slaves, but requests additional protocol for the right to use the transmit line from only one party at a time. This Protocol has been implemented in software and the enable/disable of each RS485 transmitter works usually over the RTS control signal. This requirement for RS485 multipoint protocol causes RS232 applications to fail when directly used for RS485 configurations. SER-485 Lite provides a unique bitrate speed adaptive ART feature, which take over multipoint protocol requirements for RS485.

3 Operation Modes

The SER-485 Lite provides versatile operation modes. These are configured by software and DIP Switches. Frequently used operation modes can be configured by DIP Switches directly.

DIP1	DIP2		Selected Operation
ON	ON		RS485 2-wire, controlled by ART, long Tx Off Delay (see below)
OFF	ON		RS422 4-wire
ON	OFF		Uses parameters as configured by software (page 7)
OFF	OFF		Enable configuration menu 115200,8N1

Table 1: Operation configured by DIP Switches

The first two of these configurations are very common, so they are available by simply setting the switches. To get the full benefit of the SER-485 Lite versatility, users have to use the “Configuration by Software” (page 7). This is not as complicated as it may sound. The configuration is done in an interactive way, so there is very little risk of damage.

When the intended configuration is saved to non volatile memory in the SER-485 Lite, the [DIP Switches](#) shall be set to the OFF ON setting.

4 Technical Data

Operation	16 different conversion modes
RS232 signals	TxD/RxD, RTS/CTS, DTR, GND (DB9 female configured as DCE or DTE)
RS422 signals	DB9 male: Tx+/-, Rx+/-, RTS+/-, CTS+/-, GND Terminal Block: Tx+/-, Rx+/-, GND
RS485 signals	4-wire: Tx+/-, Rx+/-, RTS+/-, CTS+/-, GND 2-wire: Data+/-, GND On DB9 male and Terminal Block
Power	5V DC 80 mA, over Power Jack or pin 9 (RI) of RS232 port
Dimensions	52 x 73 x 20
Speed	RS422: 1Mbps RS485 by ART: 250 kbps RS485 by RTS/DTR: 1 Mbps
Termination	120 Ω provided internally
Polarization	Provided internally for 120 Ω termination
LED	Power, TxD, RxD

In RS422 mode the SER-485 Lite is capable of any transmission speed, up to 1 Mbps. This mode is used in a 4-wire full-duplex configuration. The RS485 mode is available in 4-wire full-duplex configuration, and in 2-wire half-duplex configuration. The later operates with or without local echo of transmitted data. The transceiver (data direction in half-duplex mode) can be controlled by RTS, DTR or the automatic named as ART. This automatic analyzes the transmitted data in real time, and adapts to the detected bit rate. The serial speeds controlled by ART range from 300 bps to 250 kbps. When controlled by RTS or DTR the maximum serial speed is 1 Mbps.

5 Configuration of Hardware

The operation modes of the SER-485 Lite are configured by [DIP Switches](#), some options require to use certain jumpers. [Figure1](#) is the view of all available options.

5.1 Connectors

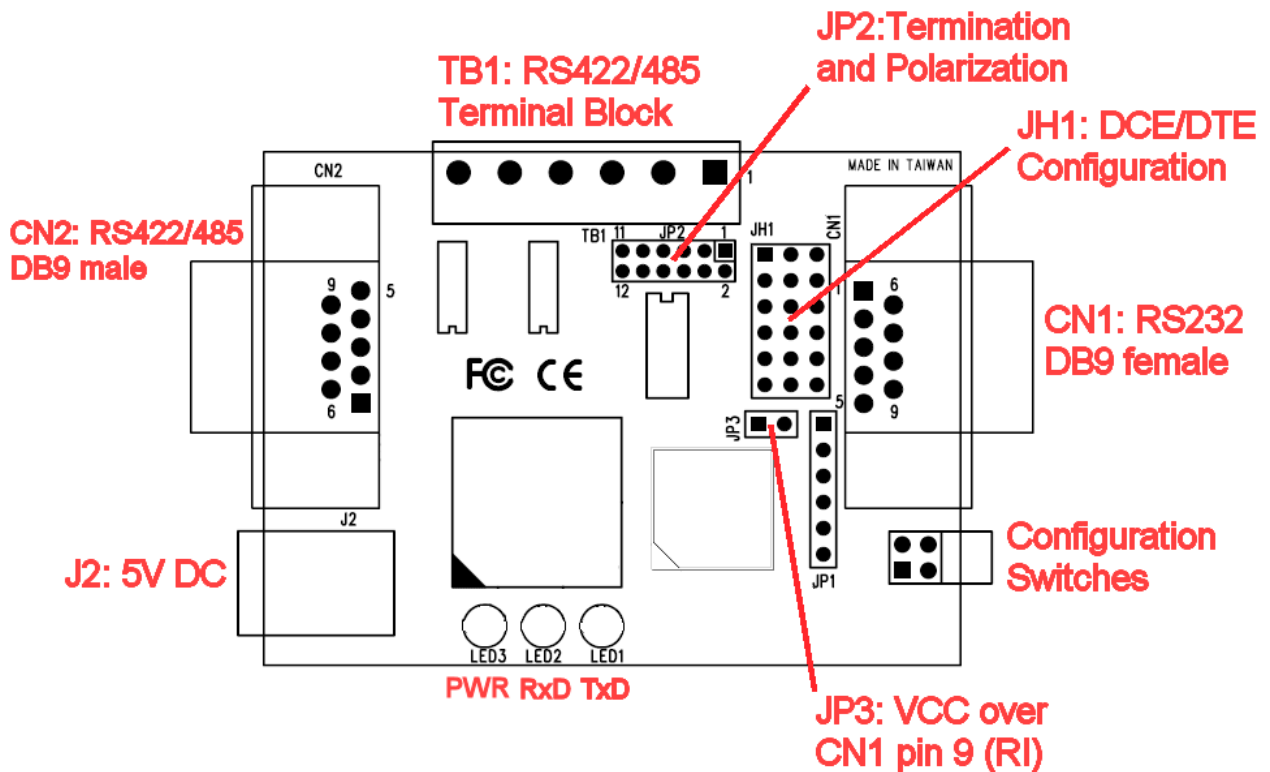


Figure 1: Internal view of SER-485 Lite

CN1 is a DB9 female connector to attach the SER-485 Lite to an RS232 serial port. The pin assignment is DCE (like a modem) as factory setting, a straight connection cable to Com1 of a PC is required. Using jumper block **JH1** the assignment can be changed to DTE (like Com1/PC), please check the cable carefully when attaching to the RS232 port of your device.

J2 is the power input for 5V DC regulated power.

CN2 is a DB9 male connector. All signals of RS422 and RS485 are available on this connector.

TB1 is a Terminal Block with 6 positions. The RS422 and RS485 signals Tx± and Rx± are in parallel to those of **CN2**. Of course GND is available here, and also VCC is placed on TB1.

5.2 Signal Assignments RS232

The signals of RS232 are connected to CN1, the exact configuration is defined by **JH1** and **JP3**.

5.2.1 CN1 (DB9 RS232)

Pin	DCE signal	DTE signal
1	nc.	nc.
2	RxD	TxD
3	TxD	RxD
4	DTR	DSR
5	GND	GND
6	DSR	DTR
7	RTS	CTS
8	CTS	RTS
9	Opt. VCC in	Opt. VCC in





Table 2: RS232 DB9 female


The signals RxD, DSR and CTS are output, and have to be connected to the input signals of Com1, named the same. DSR is permanently active.

5.2.2 JH1 (DCE or DTE)

JH1 is used to select the signal assignment of the RS232 port. If all left positions are closed, the serial port is configured as DCE (factory setting), all right positions closed select the DTE assignment.



DCE



DTE

DCE	1-2, 4-5, 7-8, 10-11, 13-14, 16-17 closed
DTE	2-3, 5-6, 8-9, 11-12, 14-15, 17-18 closed

Table 3: JH1 (DCE / DTE)

5.2.3 JP3 (Power over Serial)

If JP3 is closed, pin 9 of CN1 is connected to VCC (5V DC). So the SER-485 Lite can be powered over the serial cable. Either by an extra supply connected to the cable, or by the serial port if it supplies +5V DC on pin 9.

Usually pin 9 is an input to RS232, so it does not hurt to apply +5V from the external device. If CN1 is configured for DTE mode by JH1, it is likely pin 9 of the connected device is an output signal. In this situation JP3 *must* be left open.

5.3 Signal Assignment RS422 / RS485

The signals of RS422 / RS485 are available on CN2, and a subset of them are connected to the Terminal Block TB1.

5.3.1 CN2 (DB9 RS422 / RS485)

Pin	RS422	RS485 2-wire
1	Tx-	Data-
2	Tx+	Data+
3	Rx+	
4	Rx-	
5	GND	GND
6	RTS-	
7	RTS+	
8	CTS+	
9	CTS-	




Table 4: RS422 / RS485 DB9 male

CN2 with the 9 pins carries the maximum of available signals. The RTS $\pm$ and CTS $\pm$ are only available on this connector. These signals are rarely used, only in certain configurations.

The data signals Tx $\pm$ and Rx $\pm$ are more common. They are also available on TB1, see below.

Using the so-called 2-wire or half-duplex mode, the signals Tx+ and Tx- are used to both transmit and receive the data. So the signals are renamed to Data+ and Data-. Half-duplex mode is only available in RS485 configurations.

5.3.2 TB1 (Terminal Block RS422 / RS485)

The Terminal Block TB1 provides the common subset of RS422 and RS485 signals, i.e. the data signals. The signal GND is also available, as well as the internal power supply VCC (+5V DC).

6	5	4	3	2	1
GND	VCC	Rx-	Rx+	Tx+	Tx-



Table 5: Terminal Block

As mentioned above in half-duplex mode the signals Tx+ and Tx- change their names to Data+ and Data- respectively, because the data is transmitted on these lines.

5.4 LED

There are three LED in the SER-485 Lite:

- LED1 is Green, it flickers when SER-485 Lite receives data from the RS232 port of the PC.
- LED2 is Yellow, it flickers when SER-485 Lite sends data to the RS232 port of the PC.
- LED3 is Red, it lights when the power of +5V DC is supplied to the SER-485 Lite.

6 Termination and Polarization (BIAS)

Termination and Polarization are important functions of RS485 data transmission. Termination is used to protect against signal ringing, it damps out reflected signals. Polarization is required to protect against noise on the data lines, at times when no device is actually transmitting data. In RS422 mode the transmitter is driven permanently, so polarization is only required for RS485 operation.

Why Polarization is important is described on page 19, polarization is also named as BIAS. Some hints for Termination are given on page 19 as well.

6.1 JP2 (Termination / Polarization)

These functions are activated by JP2.

Jumper	Function
1-2	Polarize Tx+
5-6	Polarize Tx-
7-8	Polarize Rx+
11-12	Polarize Rx-
3-4	Terminate Tx+ to Tx- (120Ω)
9-10	Terminate Rx+ to Rx- (120Ω)




Table 6: Polarization and Termination

Termination may be applied to each end of the cable, so only two termination resistors are allowed. If more than two devices are connected to the cable, the middle devices must deactivate their termination. The value of the resistors must match the impedance of the cable used to connect the devices.

Polarization is allowed at a network only once. It is a failure to activate this in two or more devices. The polarization in the SER-485 Lite is designed for termination resistors of at least 120Ω . It may safely be used for higher values, including no termination at all. Lower impedance cables (smaller resistors) require special circuitry. This can be attached externally to TB1, because VCC is available there.

6.2 Power supply

The power input to the SER-485 Lite is very flexible. Usually the SER-485 Lite is powered by an external adapter, which is connected to J2. The terminals for VCC and GND (5 and 6) on the Terminal Block are directly connected to J2. As the result the supplied power can also be used on these terminals to drive a small external circuitry, e.g. a modified polarization.

If required the SER-485 Lite can also be powered by connecting a power supply of +5V DC to TB1 pins 5 and 6. This is just the opposite direction, but provided as an alternative way.

In case the internal jumper JP3 is closed, also pin 9 of CN1 is connected to VCC. Pin 5 on CN1 is connected to GND anyway. This connection can be used to power the SER-485 Lite from the RS232 port. Some serial ports provide a suitable power on pin 9, which normally is used as RI. When there is no modem attached to the serial port, RI isn't used anyway.

If the SER-485 Lite is not powered via the RI-pin, please make sure JP3 is either open or +5V will not harm your device (PC).

7 Configuration by Software

The SER-485 Lite will usually be connected to a PC at Com1 or another serial port. Most computers will have a Terminal Emulation program already installed. On Windows Systems this will be Hyper Terminal, on Linux it is miniterm, on DOS systems there are several programs like Telix or Telemate. If no suitable program is installed on the target system, the configuration can be done on any other computer. The parameters are saved to a non volatile memory, and they are activated by the [DIP configuration](#) OFF & ON.

Open the Terminal Emulation in VT100 mode¹, and configure the serial port (Com1) to 115200 bps, 8 Data bits, No Parity and 1 Stop bit. Flow Control (Handshake) is not used, so neither RTS/CTS nor XON/XOFF must be active.

Set both DIP Switches to the OFF position, and wait a few seconds. The interactive menu will appear, it may look like [figure 2](#):

¹ANSI Terminal Emulation is also suitable

```
VScom Converter SER-485 Lite v1.2.2                               www.vcom.de
                                                                    www.visionsystems.de

Operation Modes
1:  RS-422
2:  RS-485 controlled by RTS
3:  RS-485 controlled by DTR
4: * RS-485 controlled by ART
a: * Tx switch off Delay (long,  11 bit)
b:  Tx switch off Delay (medium, 6 bit)
c:  Tx switch off Delay (short,  2 bit)

Cabling Schemes
d:  Full Duplex (4-wire)
e:  Half Duplex (2-wire) with Echo
f: * Half Duplex (2-wire) no Echo

W: + Write to memory          R:  Read from memory

Enter new choice :
```

Figure 2: Menu Factory Settings

If the Terminal Emulation is not VT100, the terminal will show some funny control characters. However the menu can still be read and controlled. To refresh the appearance of the menu on the screen, hit the <Enter>-key. You'll also notice the 'Enter new choice : ' line to flicker about once per second. If this annoys, just hit the Space-bar.

The top section of the menu is for the various Operation Modes available on SER-485 Lite, the lower section selects details about the cabling used for communication.

To change the configuration punch the keys noted in the left column. The menu will change and reflect the new configuration. An active option is marked with an asterisk '*', the menu is re-written after each keystroke.

When the configuration is complete, the 'W' key will save the parameters to the non volatile memory of the SER-485 Lite. The menu is still open, so further changes can still be done.

If the configuration happens to appear as confused, the latest configuration saved can be read back from the memory by the 'R' key. If no changes were done, the displayed configuration is the same as the saved parameters. This is noted with a '+' sign after the 'W' option.

Some options are useless when certain configurations are selected in above parameters. For example, RS422 mode is a 4-wire operation by definition, and Tx is never switched off. So these options are hidden, and the menu will look like [figure 3](#):

```
VScom Converter SER-485 Lite v1.2.2                               www.vscom.de
                                                                    www.visionsystems.de

Operation Modes
1: * RS-422
2:  RS-485 controlled by RTS
3:  RS-485 controlled by DTR
4:  RS-485 controlled by ART

W: + Write to memory          R:  Read from memory

Enter new choice :
```

Figure 3: Menu Configuration as RS422

Likewise, when the RS485 transceiver is controlled by the RTS or DTR signal, there is no automatic switch off of the driver. The delay is not offered for configuration.

Once the configuration is done, it shall be stored by the 'W'-command. To use the defined configuration, the [DIP Switches](#) shall be set to the OFF ON setting. When any DIP setting other then OFF OFF is selected, the menu is closed like figure 4.

```
VScom Converter SER-485 Lite v1.2.2                               www.vscom.de
                                                                    www.visionsystems.de

Operation Modes
1: * RS-422
2:  RS-485 controlled by RTS
3:  RS-485 controlled by DTR
4:  RS-485 controlled by ART

W: + Write to memory          R:  Read from memory

Enter new choice :

Configuration closed ...
```

Figure 4: Menu Configuration closed

7.1 1 – RS-422

Historically RS422 has been defined before RS485, as a successor of RS232. It is much simpler to use than RS485. The transmitter is permanently active, the cabling is defined as 4-wire full-duplex. There is no further option to configure.

This option is used if the RS422 operation is selected by the ON OFF configuration of the [DIP Switches](#).

7.2 2 – RS-485 controlled by RTS

RS485 requires to switch the transmitter (Tx) off when no data is sent. This frees the wires, they are available for another station to transmit data. When data has to be sent, the transmitter is activated again. If the wiring uses the half-duplex scheme, data can be received when Tx is in the Off state. In these situations the status of transmitter is also referred to as “Data Direction”.

There are different methods to control the transmitter. A very common one is to use the RTS signal from the PC, connected to the SER-485 Lite. Most devices (other converters, RS485 serial ports of add-on cards, ...) on the market support this method, even the Windows API for serial ports has an option to do this in an automated way. Nearly all applications for control of RS485 devices provide the RTS method of transmitter control.

When the serial port sets RTS in the active state, the SER-485 Lite activates the transmitter for Tx. Later the port sets RTS as inactive, and the SER-485 Lite switches the transmitter for Tx as Off. The software sending the data is responsible to activate RTS before sending the data. And also it is responsible to deactivate RTS when all data is sent. The delay between the last data byte and RTS Off shall be as short as possible.

RTS and CTS are also converted to RS422 and available on CN2, the male DB9 connector. Even when Tx is controlled by RTS the signal changes are reflected on CN2. RTS should not connect to other devices when it is used to change the Data Direction.

7.3 3 – RS-485 controlled by DTR

In some configurations the signal RTS is already used on the RS485 lines for some purpose. So it can not be used to control the Tx transmitter. The SER-485 Lite allows to control Tx by DTR instead of RTS.

DTR is not converted to the RS422 / RS485 lines, so it is free for other purposes. Software can use DTR in the same way as the RTS signal to control Tx. In fact the hardware of some serial ports (Ox16C950) provides options to control DTR by an internal hardware automatic. Unfortunately such hardware is not available for Com1 in standard PCs.

7.4 4 – RS-485 controlled by ART

Controlling the transmitter by a dedicated signal is a simple implementation in converter hardware, so many devices used this method in the past years. Using Operating Systems like DOS offered easy control of RTS to the application program. However modern OS like Linux or Windows block direct access to hardware by application programs.

Further serial speeds have been increased in the past years, so fast control is a demand. At 115200 bps a character lasts less than 0.1 millisecond, often application software does not have simple access to such precise time control.

As a result some hardware automatic for control of the RS485 transmitter is required. The SER-485 Lite offers such named as ART (*Automatic Receive Transmit control*). ART analyzes the transmitted signals in real time to detect the configured serial speed. It adapts to that speed, and sets the transmitter in On or Off state as required.

All data sequences begin with a Zero bit, called the Start Bit. This is a signal to ART to activate the transmitter. When no more data is sent ART deactivates the transmitter. The configuration and selection of proper parameters is explained in [7.4.1](#) and [9.1](#).

This option is used if the RS485 operation is requested by the ON ON configuration of the [DIP Switches](#).

7.4.1 a – Tx switch off Delay (long, 11 bit)

This is a configuration option for the ART function. There is no precise *and* fast way to detect the end of a data transmission by analyzing the stream of bits on the line. Data is transmitted as a sequence of Zero and One bits, when no data is transmitted the data line is also in the One-state.

ART analyzes the data line in real time to detect the bit rate. Based on this rate ART counts consecutive bits sent as One. Users configure the time by giving the number of One bits to hold the transmitter active. This option ‘a’ *guarantees* the transmitter is not deactivated in the middle of a data transmission. As the result the turn-over time to receive state in 2-wire mode may be longer than necessary. This is explained in detail on page [22](#), together with electrical specifications of RS485.

This option is used if the RS485 operation is requested by the ON ON configuration of the [DIP Switches](#).

7.4.2 b – Tx switch off Delay (medium, 6 bit)

This option provides faster turn-around times to an inactive transmitter. However it is long enough to have an extremely low risk of an inactive transmitter in the middle of transmitted data. In many circumstances this will not happen. When cabling and the electrical configuration is correct, even this will not cause damaged data. This is explained in detail on page [22](#).

7.4.3 c – Tx switch off Delay (short, 2 bit)

This option provides very fast turn-around times to an inactive transmitter. However it may cause a deactivated transmitter while the data transmission is still active. This requires careful configuration of cabling and electrical configuration. Please read on page [22](#).

7.5 Cabling Schemes

Cabling schemes are the different possibilities to connect devices to each other.

7.5.1 d – Full Duplex (4-wire)

Usually RS485 is used in the so called 2-wire mode. This means data is sent and received on the same pair of wires named Data $\pm$. Obviously each device can either receive or send data at a given time, so this mode is also called half-duplex. Because all devices are connected in parallel to this wire pair, another name of this configuration is bus-mode.

However there are some configurations requiring a dedicated pair to transmit data, and to optionally receive data at the same time on a second pair. This is similar to RS422, so in most of these cases the configuration as RS422 is more simple. RS485 in 4-wire is required, when there are two or more devices transmitting on a given pair, while they receive on a second pair.

To provide this function the SER-485 Lite offers option 'd' in the menu. This is available for all control modes of the transmitter, regardless of RTS, DTR or ART.

7.5.2 e – Half Duplex (2-wire) with Echo

As described in option 'd' in most situations RS485 is used with only one pair of wires for data transmission. Basically this operation mode has been the reason to design specifications of RS485. Of course the SER-485 Lite offers this option also.

Since the same pair of wires is used to transmit and receive data, the hardware can simultaneously receive the data it is just sending. This is called the Echo.

Software can compare the received data to that just sent, this may provide an option of check for line congestion. However the electrical specifications of RS485 do not guarantee to detect such a situation. So the Echo is rarely used.

7.5.3 f – Half Duplex (2-wire) no Echo

The Echo as defined in option 'e' is usually not intended. Either the software has to suppress it, or this task is given to the hardware. Since the SER-485 Lite controls the transmitter state, it can suppress any received data while it is transmitting.

This option is used if the RS485 operation is requested by the ON ON configuration of the [DIP Switches](#).

7.6 P – Programming Interface

One additional option is not shown in the menu, this is for configuration by specialized programs. Users may program their own applications for configuration of the SER-485 Lite. Instead of reading the menu and simulating user input such configuration software may use a simpler way. The software may send the character 'P' in upper case to open another way of configuration.

In this interface the SER-485 Lite sends an exclamation mark '!' as a prompt. The software may send a command once this prompt is received. The available commands are the same as described above, i.e. the software sends single characters to change the configuration. Wait for the prompt between the command characters.

These single characters are already defined, they are the same keys the user may type ([figure 2](#)).

After each command is executed the SER-485 Lite sends the current configuration as a string, listed in quotation marks. This configuration is followed by a CR-LF sequence, plus the exclamation mark as prompt. To receive the current configuration the software may simply send a Space character as command. This does not change the configuration, but reports the status (figure 5). This example has been created by sending the characters 'R', '4', 'B' and 'E' after receiving the prompt character '!'.

```
Enter new choice : P
!"1AD      "
!"4AD      "
!"4BD      "
!"4BE      "
!
```

Figure 5: Menu Programming Interface

The configuration string is seven characters long, only the first three are relevant for the SER-485 Lite. The active options are listed first, the last four positions are reserved for other devices with more options. Since this interface is for applications, and not manual user input, all configured options are returned. This includes options not in effect, as shown in 5. The options A and D have no effect, since the device is in RS422 mode (1) initially.

The non volatile memory may be read by 'R', and the configuration is saved by the 'W'. The software should not send control characters as commands. Two commands are for manufacturing use only, these are the 'T' and the 'X'; both in upper case. They have special results, which may require to reset the SER-485 Lite to achieve normal operation. Software *must not* send these commands.

When the user accidentally hits the 'P', he can return to the menu by the <Enter>-key. The menu appears, and displays the current configuration.

7.7 U – Firmware Update

For manufacturing purposes there is an option to update the firmware of the SER-485 Lite. The command 'U' (upper case) starts this function. If it is activated by accident, the SER-485 Lite has to be restarted.

The process of update and the tools required for that is described in [section 10 on page 23](#).

8 Proper Cabling

This paragraph will provide a little bit of theory about RS422 and RS485 data transmission. It is necessary to have this basic knowledge, to avoid or find errors in data transmission. If you are familiar with RS485 and RS422, do *not* skip this section, it covers common misunderstandings.

Failures in cabling are responsible for the vast majority of transmission problems.

8.1 Transmission Technique

RS422 and RS485 use the same balanced transmission method. Signals are not transmitted as voltage on a single wire, as RS232 does. Instead two wires are used; when one carries high voltage, the other one carries low voltage. The signal is defined by the difference in voltage between those two wires. This hardens the transmission against noise. Usually twisted pair cables are used, which further reduces the sensitivity for noise.

Typical voltages are +4V as high, about +0.5V as low. These voltages are defined against the GND signal of the transmitter. The minimum *differential* voltage is required as $\pm 200\text{mV}$ by the specifications of RS422 and RS485. The receiver detects the polarity of the differential voltage, and thus gets a Zero (negative) or a One (positive).

To do this detection the voltages on the receivers side have to be inside the bounds of the common voltage range defined as -7V through +12V, as measured against the local GND of the *receiver*. To make sure the signals meet the common voltage range, the GND of sender and receiver must be connected somehow. To insure the signals are in the valid voltage range and the differential voltage can be correctly sensed by the receiver the GND lines of the transmitter and receiver must be connected. This is often forgotten. In these cases the GND connection can be indirectly established over protective ground or over "parasite ground loops", which usually yield a bad GND connection. For these situation the correct data receiving is not reliable or not possible.

8.2 Termination

When transmitted signals arrive at the end of a cable, they get reflected. They travel on the cable some more times, which is called ringing. This can cause false reading of transmitted data. When the reflections travel on the cable several times, they are damped and do no longer cause errors. This happens earlier if the cables are short.

For long cables Termination Resistors are required. These increase the damping of reflections. The value of the resistor must match the impedance of the cable, typically 120Ω . The SER-485 Lite provides an option to activate such resistors by JP2.

As a rule of thumb², when the cables are longer than $\frac{1000000}{\text{Bitrate}}$ (one million divided by the bit rate) in meters, you should consider Termination Resistors.

8.3 Polarization

In RS485 the sender must activate the transmitter before sending data, and deactivate it when all data is sent. At times when no devices send data *all* transmitters are inactive. As the result the data lines are floating, and the differential voltage is undefined. It may happen the next data is not correctly recognized, because the change from undefined to data signals is not detected.

To avoid such problems the data lines should be polarized by resistors. These insure the differential voltage to be above +200mV. Typically the positive line is pulled to +5V, while the negative line is pulled to GND. When Termination Resistors are applied, the voltage on these must be +200mV or above. The SER-485 Lite provides an option to activate such resistors by JP2. They are calculated for termination resistors of 120Ω .

²Assuming group speed of 100.000km/s, 10 travels to damp out, and 10% of bit time

The Polarization Resistors must not be too small, because a transmitter has to act against them. A typical transmitter provides up to 60 mA of current in high and low level.

8.4 2-Wire Scheme

In many configurations a very simple cabling is required. RS485 allows for so called 2-wire cabling as shown below. Several devices are connected in parallel to the wires, which is called bus topology. Each device can either send or receive data at a given time, so it is operating in half-duplex mode.

Shown in figure 6 are three devices, RS485 specifies up to 32. The data lines are named as Data+ and Data-, a positive differential voltage is the state for a transmitted One. The GND is also connected between all devices as required.

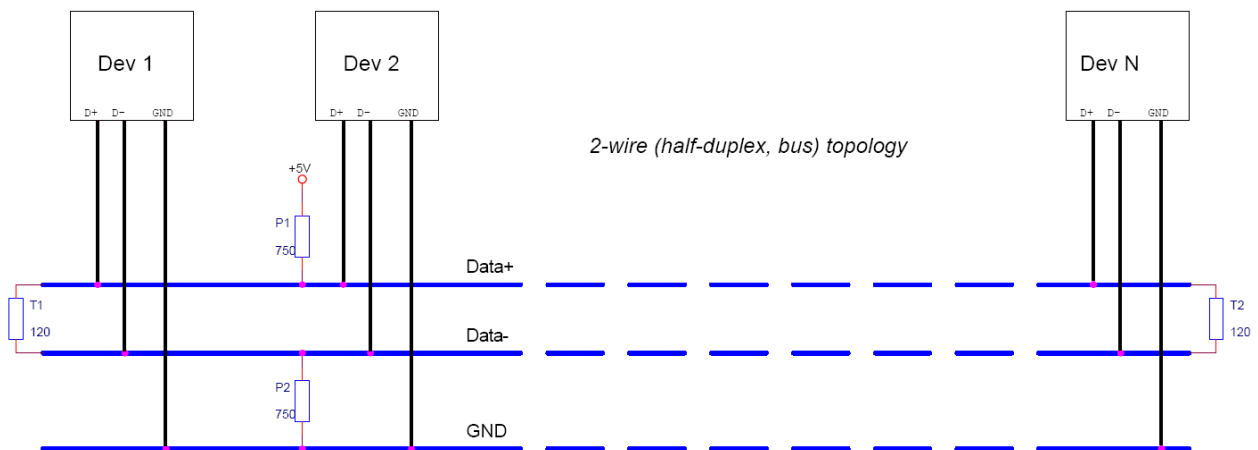


Figure 6: 2-wire cabling scheme

The resistors P1 and P2 are for polarization, T1 and T2 are for the termination function. Polarization of Data+ and Data- appears only once on this net, the termination is at the physical ends of the cable.

All devices appear the same on the cable, they have the same function. There is no Master or Slave defined by the hardware. Such functions are implemented by way of the data transmission protocol. Also RS485 addresses are defined by that protocol, as well as bus access.

8.5 4-Wire Scheme

RS422 requires dedicated wire pairs for transmit and receive. The transmit wires are used to send data to as many as 10 receivers, as stated in the specifications of RS422. Since the SER-485 Lite uses RS485 line driver technology, up to 32 receivers are possible.

While one pair is used to transmit, a second pair is available to receive data at the same time. When only two devices are connected, this is a possible replacement of classic RS232 connections.

In RS485 4-wire mode the transmit wires may be shared between dedicated stations. As an example a second station can be a backup master for the network. Masters can send data and commands to one station, while they receive information from another device.

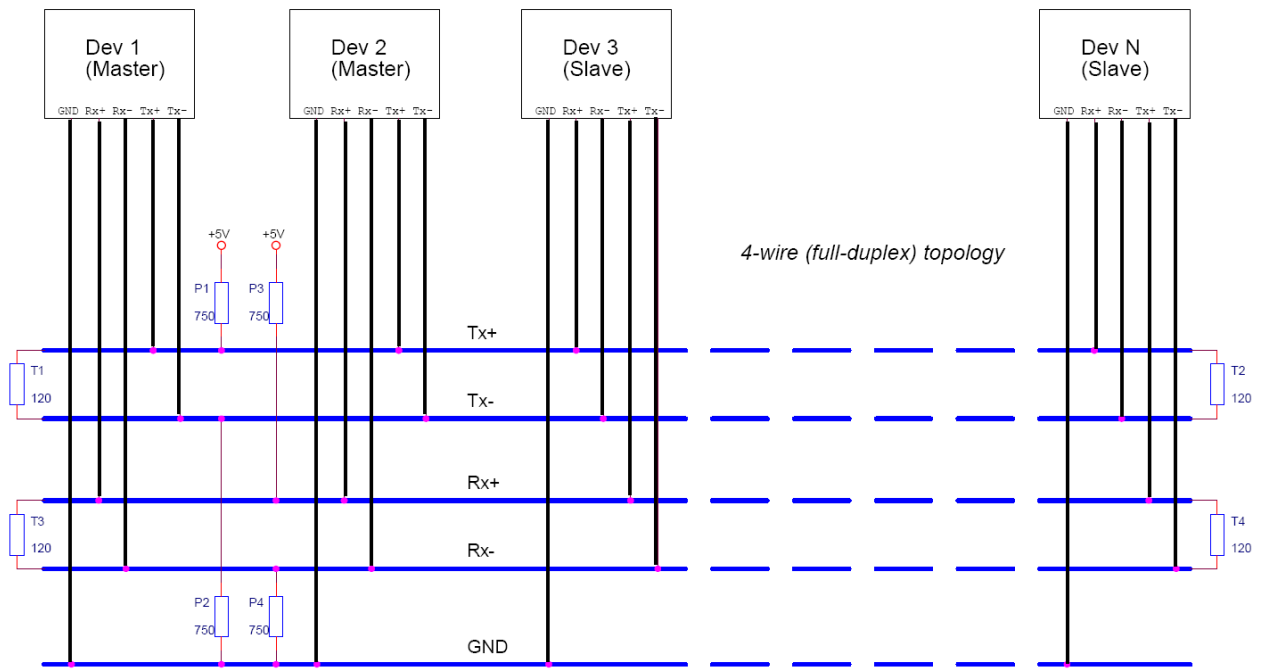


Figure 7: 4-wire cabling scheme

Figure 7 displays the wire pairs $Tx_{\pm}$ and $Rx_{\pm}$ as named for Devices 1 and 2. There are more slave devices, two are shown. The slaves transmit on the Rx-lines, and receive on the Tx-lines. The GND line is also connected, to implement the Common Voltage Range as specified.

Masters on the network are identified because they transmit on the Tx-lines. The two Masters in figure 7 have to synchronize their use of the Tx-lines by extra means. E.g. Dev 2 can be a backup master, which is manually activated.

Also indicated in figure 7 are polarization resistors P1/P2 for $Tx_{\pm}$ and P3/P4 for $Rx_{\pm}$, only once per wire pair. Further Termination resistors T1/T2 for $Tx_{\pm}$ and T3/T4 for $Rx_{\pm}$ are added, one at each end of the cable. To ensure the Common Voltage Range the GND is also connected at each device.

9 ART and Polarization

In the SER-485 Lite the automatic ART monitors the phases of high and low on the RS232 line. These phases define the One and the Zero bits, as well as characters. The length of these phases is measured, and calculated to the current bit rate.

Each data transmission begins with the Start bit of the first character, which is a Zero bit. ART activates the RS485 transmitter when this Zero is detected, and sends this Zero on the RS485 wires, as a negative polarity.

The following data and optional parity bits are Ones or Zeroes, each character is ended with a Stop bit with value One. To make a successful transmission all these bits must appear on the RS485 wires without corruption.

When the transmission has ended, the RS232 line is in the One state. Thus the RS485 line is also in the One state, the positive polarity. ART detects this permanent condition, and deactivates the RS485 transmitter.

The following is discussed for 2-wire mode, so ART controls the data direction. Further it is recommended to have good polarization of the data lines, the reason is explained on this page.

9.1 ART 11 bit delay

The longest possible character on RS232 has 8 data bits, one Parity and two Stop Bits. If all these bits are a logic One, there are 11 consecutive One bits on the serial line. So no matter what data is transmitted in which serial configuration, ART will never switch off the transmitter while data is still transmitted.

However in usual 8N1 configuration, the last data bit is often a Zero. So ART turns the direction 10 bits after the last character, which is exactly one character time. This is suitable fast, especially with high bit rates.

For specially crafted short data transmissions, ART may calculate the bit rate as too low. So the time of direction change may be longer than one character.

9.2 ART 6 bit delay

To give a faster direction turn, ART may use a delay of only 6 bit. Very few characters have more than 6 consecutive One bits, so this configuration is also safe in standard circumstances. Even when ART deactivates the RS485 transmitter because of such data, the polarization as mentioned on page 19 holds the polarity on a positive level. This is still recognized by the receiver as a One, so the data is received correct. The next Zero bit activates the RS485 transmitter again, the transmission continues safe.

9.3 ART 2 bit delay

This short delay option is for very fast direction turn times. Since many characters have 3 or more consecutive One bits, there is a high likelihood for ART to deactivate the transmitter while data is transmitted. As the benefit the SER-485 Lite can receive data as soon as the transmission has ended.

To protect against corrupted data, the Polarization (see on page 19) is very important. When ART deactivates the RS485 transmitter, the polarization ensures the data is still read as One, as it is sent from RS232.

It is strongly recommended to use this configuration option only when required, with polarization and after careful examination of the noise level.

10 Firmware Update

Connect the SER-485 Lite to a serial port of your PC. Open a Terminal Program for this serial port. Configure the port to 115200,8N1 as the serial parameters, and use VT100/ANSI as Emulation when available. Otherwise use the Emulation of a Dumb Terminal. Open the serial port with this configuration.

On the SER-485 Lite set both DIP switches to the OFF position. The configuration menu will appear in the terminal program. There is a possible command not displayed on the screen. Enter a 'U' in upper case. This is the command for firmware update. The SER-485 Lite will prompt with an exclamation mark '!' in the next line. The SER-485 Lite is ready to accept the start sequence from the update software. If an update is not desired, it is required to reset the SER-485 Lite now.

In the Terminal Program close the connection to the serial port. There may be a command for disconnect, or simply close the program completely. The serial port will be available for other software.

Open a console Window³ in the folder where the update utility vs_fw_update.exe resides. To simplify the update the new firmware image should also be available in that folder. Issue the command

```
vs_fw_update.exe Com1 firmware.bin 115200
```

Com1 has to be replaced with the serial port the SER-485 Lite is connected to. Likewise firmware.bin is a place holder for the new image file. The 115200 instructs the update program not to use automatic configuration.

The update program establishes contact to the SER-485 Lite, and verifies it is really a suitable device. The firmware image is sent to the SER-485 Lite, and saved to the Flash memory. The software returns to the command prompt, when the task is done. Please check for error messages.

When the update process was successful, re-open the serial port in the Terminal Program as before. Reset the SER-485 Lite and check if the configuration menu appears again.

³Also called DOS Box